
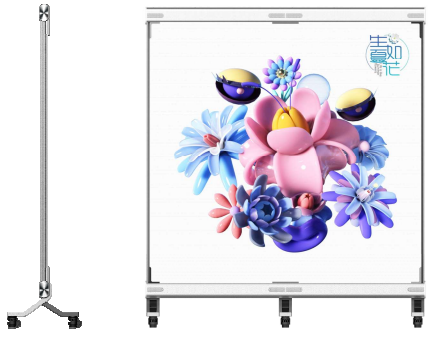


Item	A3-2	A3-4
Model		
Pixel Pitch (mm) (horizontal / vertical)	3.91/3.91	3.91/3.91
Pixel Density (dot/m ²)	65536	65536
Transparency Rate	80%	80%
Display Dimension (mm) (w*h)	1000*2000	2000*2000
Profile Dimension (mm) (w*h)	1021x2452×500 /1021x2230×75	2021x2452×500 /2021x2230×75
Resolution (dot) (w*h)	256x512	512x512
Weight (kg/set)	40	60
Brightness(cd/m ²)	≥3000	
Scanning Mode	Static Driving (Single pixel single control)	
Encapsulation Type	Light Board & Driving Board Integrated	
Lifespan	≥ 100,000.00 hours	
Pixel Configuration	16bit	
Maximum Power Consumption (w/m ²)	1000	
Average Power Consumption (w/m ²)	375	
Control System	Colorlight / Novastar	
Input Voltage	AC100~240V 50/60Hz	
Working Voltage for Module	DC4.2V ±0.2V	
Working Temperature	Temperature 0°C ~50°C	
Working Humidity	Humidity 20%RH ~ 90%RH (Without Condensation)	
Storage Temperature	Temperature -20°C ~70°C	
Storage Humidity	Humidity 10%RH ~ 95%RH (Without Condensation)	
Protection Degree	IP20	
Frame Material	Aviation Aluminum Alloy	
Installation Environment	Indoor	
Packing Way	Pearl Cotton+Wooden case/Airbox	

Statement: The relevant parameters in the table are subject to real-time update, and the data is for reference only. Upgrade will be made without further notice.